



OIL SPILL CONTAINMENT VALVE

Prevents Oil Spill Discharge

PVC MODEL


- Ideal for Warm Climates
- Corrosion-Resistant & Self-Opening
- No Power Requirement
- SPCC Compliance
- Installs in Existing Sumps
- One Single Moving Component
- Unique, Fail-Safe Design



DESCRIPTION

The Oil Spill Containment PVC Valve is an economical and effective way to prevent bulk hydrocarbon spills. Corrosion resistant PVC construction is an ideal choice for warm climates. The valve is part of a unique, self-opening system that confines the oil spill to the immediate area so it can safely be disposed.

When there is a hydrocarbon spill, the ballasted float (the only moving part of the valve), loses its buoyancy as the oil increases until it seats on the discharge port, then closes to confine the spill.

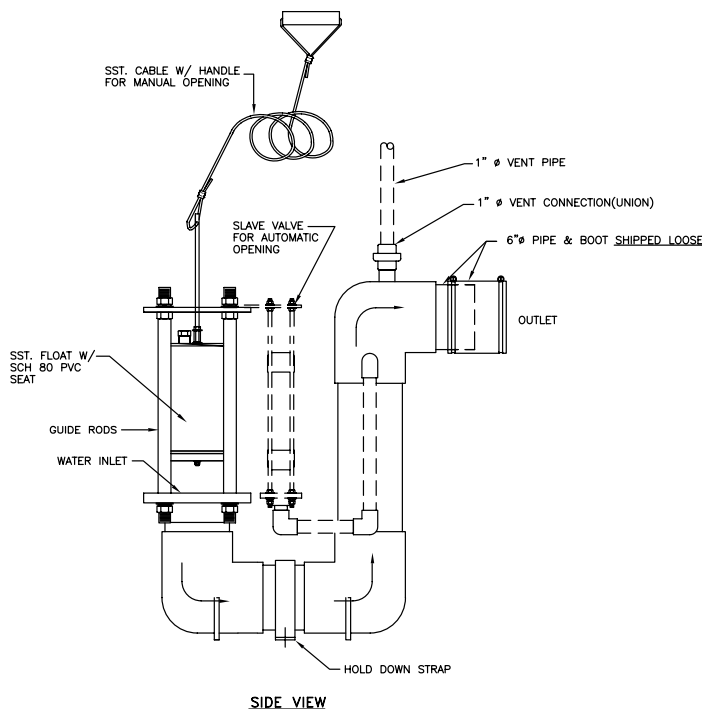

Oil Spill Containment Valve SPECIFICATIONS for PVC		
Size	Depth Below Outlet Invert	Maximum Flow Rate
4" (101 mm)	27" (686 mm)	160 GPM
6" (152 mm)	30" (762 mm)	360 GPM
8" (203 mm)	34.5" (876 mm)	600 GPM

