



The [Type 1 Economy Barrier](#) is designed for calm water applications, such as in small ponds, lakes, and small swales. These cost-effective barriers are equipped to handle turbidity in these calm water areas to keep your location in compliance with NDPS and Clean Water Act Compliance.

**Perfect for use in:**

- Harbors
- Swales
- Calm Waters
- Ponds
- Lakes
- Canals

### Typical Barrier Specifications

Flotation	Fabric	Section Connectors	Connector Fabric	Bottom Chain	Standard Length	Width
6" Marine Grade Material (depending on skirt depth)	Reinforced Impermeable Fabric	Bolt Rope Reinforced Grommet Section Ties	Poly Rope and Web Handle	Heavy Ballast Chain	50' or 100'	5'





**GRANITE**  
environmental

## Type 1 Economy Silt Barrier

**Section Length:** 50' (15 meters) and 100' (30 m), other sizes available on request

**Standard Height:** In stock: 5' (1.5 meters), Sizes 3' to 100' available

**Flotation Element:** 6" diameter marine grade, billets suitable for extended use in marine environment. These are encased in the top of the barrier fabric, creating a continuous float line. These are segregated into segments placed end-to-end, with minimal separations between billets to allow folding for shipment and storage. All float ends are tapered and blunted with no sharp edges.

**Fabric:** Impermeable Style LA1800Z Reinforced PVC Fabric, 300 lbs tensile

**Seams & Seals:** All seams are thermally welded or sewn as appropriate.

**Section Connectors:** Vertical ends connect together via HD zip ties every 12" OC through reinforced grommets.

**Anchor Points:** Anchor points are reinforced grommet at each end at the waterline. Discuss anchoring options with technical staff prior to installation.

**Ballast & Lower Tension Member:** Ballast is provided by 1/4 inch, galvanized steel chain which enclosed in a fabric sleeve at the bottom of the skirt. A screw pin shackle allows for attachment to next section, which completes system load transference.

\*\*Typical Specifications only. Manufacturing details may vary slightly depending on your location and area conditions.




**GRANITE**  
environmental

Product Solutions  
for a Cleaner World



Each [Type 1 Economy Barrier](#) is manufactured for use in calm water marine environments. All components utilized in this barriers have been selected for their chemical properties as well as their load carrying capabilities. Each screen has an integral flotation elements that has been encased in a high strength membrane. The skirt fabric is made with impermeable PVC fabric that can control and direct suspended sediments to the lower water column to settle out.

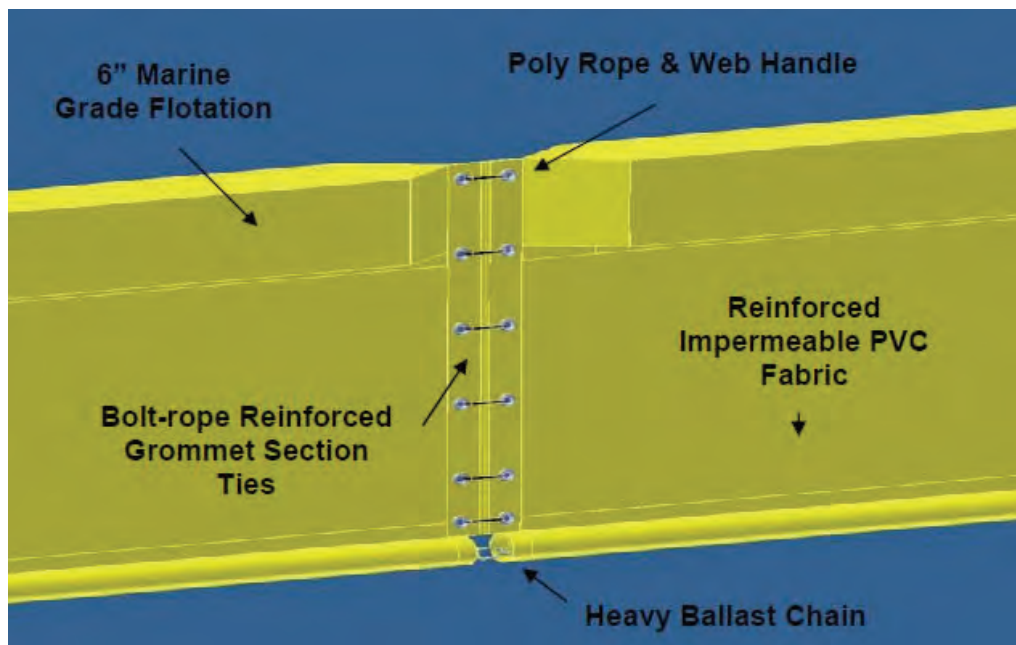

### Typical Type 1 DOT Features:

- 6" Marine Grade Flotation
- 18 oz. Reinforced Impermeable PVC
- Poly Rope & Web Handle
- 1/4" Galvanized Steel Ballast Chain
- Bolt-Rope Reinforced Grommet Section Ties

